

SPECIFICATION SHEET



5 IN 1 LED EMERGENCY EXIT SIGN

The new 5 in 1 LED Emergency Exit Sign is incredibly versatile and can be mounted in 5 different ways. The fitting uses 2W for maintained operation, which reduces to 1W in non-maintained operation.

Applications

- Offices
- Education Providers
- Retail



Image shown MPESPW + MPELLRPW

Specification

LED	15pcs of 4014
Material:	Polycarbonate (Acrylic Legend)
Lumen Output:	60lm (Sign illuminated only)
Colour Temperature:	5500-6000K
Guarantee:	2 Years
Life Expectancy:	40,000 Hours
Working Temperature:	0°C - 40°C
Power Factor:	0.5
CRI:	>70Ra


Additional Information

- *1W Non-Maintained / 2W Maintained.
- 14500 Lithium Ion 600mAh 3.2V Battery included.
- Legend sold separately.
- White RAL9016 finish.

Mounting Options:

- 90° Wall Mounting
- Ceiling Mounting Suspended
- Centre/Edge Wall Mounting
- Recessed Mounting
- Surface Mounting

Dimensions

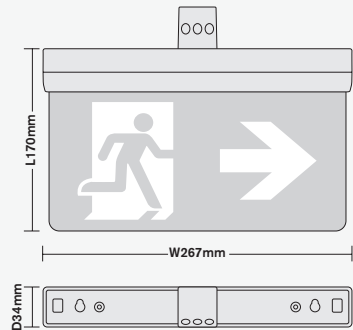

Code	Description	Dimensions (L x W x D mm)
MPESPW	5-in-1 LED Emergency Exit Sign	170 x 267 x 34
MPELUPW	Up Arrow Legend	145 x 261 x 3
MPELLRPW	Left/Right Arrow Legend	145 x 261 x 3
MPELDPW	Down Arrow Legend	145 x 261 x 3